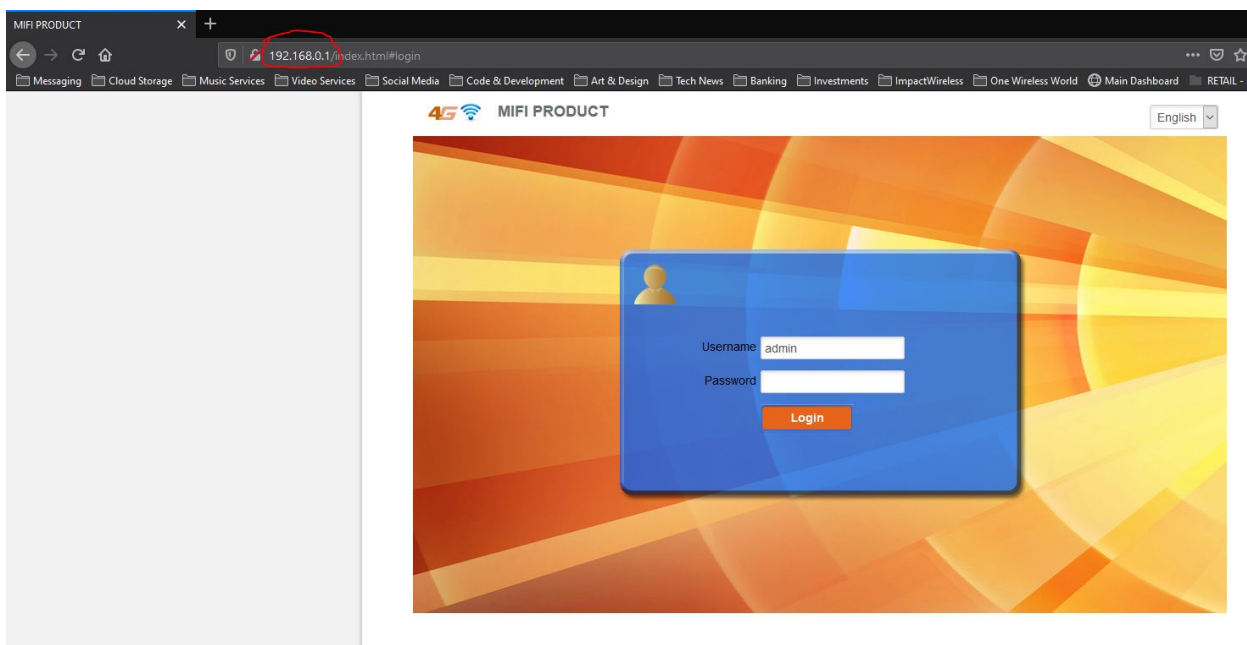


Static IP - Changing APN in Alicorn

1. Plug Alicorn into computer **or** connect to Alicorn over WiFi:



2. Open a web browser (Chrome, Firefox, etc.) and navigate to **192.168.0.1**
Username: **admin**
Password: **admin**



3. Click on **Settings**

The screenshot shows the MIFI PRODUCT settings interface. At the top, there are status icons for 4G LTE, T-Mobile, signal strength, and Wi-Fi. Below the status bar, there are language and login options: "English" and "Logout". The main navigation menu on the left includes: Home, Information, SD Card, SMS, Phonebook, **Settings** (highlighted with a red circle), Quick Settings, Network Settings, Wi-Fi Settings, Device Settings, Firewall, Router Settings, Update, SDCard Upgrade, and USSD. The main content area is titled "Quick Settings" and features a progress bar with steps 1 through 6, where step 1 is active. A "Next" button is visible. Below the progress bar, there is instructional text: "The wizard will show you how to set up gateway safely: Click 'Next' to continue, click 'Previous' & 'Next' to navigate, and click 'Apply' to save settings." and "Set basic parameters in this wizard. For advanced parameters, set them in other menu."




Copyright © 2016-2018


4. Click on **Network Settings**

The screenshot shows the MIFI PRODUCT settings interface, specifically the "Dial-up Settings" page. At the top, there are status icons for 4G LTE, T-Mobile, signal strength, and Wi-Fi. Below the status bar, there are language and login options: "English" and "Logout". The main navigation menu on the left includes: Home, Information, SD Card, SMS, Phonebook, Settings, **Quick Settings**, **Network Settings** (highlighted with a red circle), Dial-up Settings, Network Selection, APN, Wi-Fi Settings, Device Settings, Firewall, Router Settings, Update, SDCard Upgrade, and USSD. The main content area is titled "Dial-up Settings" and shows the "WAN Connection Mode" with three options: "Automatic" (selected with a radio button), "Check here, you can connect to internet in the roaming status." (unchecked checkbox), and "Manual" (unchecked radio button). An "Apply" button is located at the bottom right. Below the settings, there is a help box with a question mark icon and three bullet points: "To change current setting, please disconnect from network.", "Automatic: The device will automatically connect to network when it is powered on.", and "Manual: The device will connect to network manually."

Copyright © 2016-2018

5. Click APN

4G MIFI PRODUCT LTE T-Mobile   

English  Logout

- Home
- Information
- SD Card
- SMS
- Phonebook
- Settings
- Quick Settings
- Network Settings
- > Dial-up Settings
- > Network Selection
- > **APN**
- Wi-Fi Settings
- Device Settings
- Firewall
- Router Settings
- Update
- SDCard Upgrade
- USSD

APN

Current APN	T-Mobile US LTE
Mode	<input checked="" type="radio"/> Auto <input type="radio"/> Manual
Profile Name *	T-Mobile US LTE
PDP Type	IPv4
IPv4 APN *	fast.t-mobile.com
IPv4 Authentication	NONE
IPv4 User Name	
IPv4 Password	

?

Copyright © 2016-2018

- To change the APN, change mode from **Auto** to **Manual**. Click **Yes** on the dialog box that pops up.

4G MIFI PRODUCT LTE T-Mobile English Logout

Home

Information

SD Card

SMS

Phonebook

Settings

Quick Settings

Network Settings

- Dial-up Settings
- Network Selection
- APN**
- Wi-Fi Settings
- Device Settings
- Firewall
- Router Settings
- Update

SDCard Upgrade

USSD

APN

Current APN T-Mobile US LTE

Mode Auto Manual

Profile Name * T-Mobile US LTE

PDP Type IPv4

IPv4 APN * fast.t-mobile.com

IPv4 Authentication NONE

IPv4 User Name

IPv4 Password

?

Copyright © 2016-2018

4G MIFI PRODUCT LTE T-Mobile English Logout

Home

Information

SD Card

SMS

Phonebook

Settings

Quick Settings

Network Settings

- Dial-up Settings
- Network Selection
- APN**
- Wi-Fi Settings
- Device Settings
- Firewall
- Router Settings
- Update

SDCard Upgrade

USSD

APN

Current APN T-Mobile US LTE

Mode Auto Manual

Profile T-Mobile US

Profile Name * T-Mobile US LTE

IPv4 APN * fast.t-mobile.com

IPv4 Authentication NONE

IPv4 User Name

IPv4 Password

Confirm

✓ To change current setting, need to disconnect from network. Whether you want to disconnect or not?

Yes No

?

Copyright © 2016-2018

7. To add a new APN Profile for a Static IP, click **Add New**

The screenshot shows the MIFI PRODUCT settings interface. At the top, there are status indicators for LTE, T-Mobile, signal strength, and Wi-Fi. The page title is "APN". On the left, a navigation menu includes Home, Information, SD Card, SMS, Phonebook, Settings, and Quick Settings. Under "Quick Settings", "Network Settings" is expanded to show "Dial-up Settings", "Network Selection", and "APN". The "APN" page displays the current APN as "T-Mobile US LTE" and the mode as "Manual". The "Profile" dropdown is set to "T-Mobile US". The "Profile Name" field contains "T-Mobile US", and the "Add New" button next to it is circled in red. Below this, the "PDP Type" is set to "IPv4". There are two sections for settings: "3GPP Settings" and "3GPP2 Settings". Each section has fields for "IPv4 APN" (set to "fast.t-mobile.com"), "IPv4 Authentication" (set to "NONE"), "IPv4 User Name", and "IPv4 Password". At the bottom right, there is a "Set as default" button. A help icon (?) is visible at the bottom center of the page.

8. To set up the new profile, input these settings:

Profile Name: **T-Mobile Static**

PDP Type: **IPv4**

3GPP Settings:

IPv4 APN: **b2b.static**

IPv4 Authentication: **None**

IPv4 User Name: **<leave blank>**

IPv4 Password: **<leave blank>**

3GPP2 Settings:

IPv4 APN: **b2b.static**

IPv4 Authentication: **None**

IPv4 User Name: **<leave blank>**

IPv4 Password: **<leave blank>**

Click **Apply**

4G MIFI PRODUCT LTE T-Mobile English Logout

Home Information SD Card SMS Phonebook Settings Quick Settings Network Settings Dial-up Settings Network Selection APN Wi-Fi Settings Device Settings Firewall Router Settings Update SDCard Upgrade USSD

APN

Current APN T-Mobile US LTE

Mode Auto Manual

Profile Name * T-Mobile Static Cancel

PDP Type IPv4

3GPP Settings :
IPv4 APN * b2b.static
IPv4 Authentication NONE
IPv4 User Name
IPv4 Password

3GPP2 Settings :
IPv4 APN * b2b.static
IPv4 Authentication NONE
IPv4 User Name
IPv4 Password

Apply

?

9. Click **Manual** once more

4G MIFI PRODUCT

LTE T-Mobile

English Logout

Home

Information

SD Card

SMS

Phonebook

Settings

Quick Settings

Network Settings

▶ Dial-up Settings

▶ Network Selection

▶ APN

Wi-Fi Settings

Device Settings

Firewall

Router Settings

Update

SDCard Upgrade

USSD

APN

Current APN T-Mobile US LTE

Mode Auto Manual

Profile Name * T-Mobile US LTE

PDP Type IPv4

IPv4 APN * fast.t-mobile.com

IPv4 Authentication NONE

IPv4 User Name

IPv4 Password

?

Copyright © 2016-2018

10. Assign the new “T-Mobile Static” Profile in the **Profile** drop-down menu and then click **Set as Default**

The screenshot displays the APN configuration interface for a MIFI PRODUCT. The top navigation bar includes the 4G LTE logo, the text 'MIFI PRODUCT', and status indicators for 'LTE T-Mobile', signal strength, and Wi-Fi. A language dropdown is set to 'English' and a 'Logout' button is present. The left sidebar contains a menu with categories: Home, Information, SD Card, SMS, Phonebook, Settings, Quick Settings, Network Settings, Wi-Fi Settings, Device Settings, Firewall, Router Settings, Update, SDCard Upgrade, and USSD. The 'Network Settings' section is expanded to show 'Dial-up Settings', 'Network Selection', and 'APN'. The main content area is titled 'APN' and shows the following configuration:

- Current APN: T-Mobile Static
- Mode: Auto Manual
- Profile: T-Mobile Static (highlighted with a red circle)
- Profile Name: T-Mobile Static (with an 'Add New' button)
- PDP Type: IPv4
- 3GPP Settings :**
 - IPv4 APN *: b2b.static
 - IPv4 Authentication: NONE
 - IPv4 User Name: [text input]
 - IPv4 Password: [text input]
- 3GPP2 Settings :**
 - IPv4 APN *: b2b.static
 - IPv4 Authentication: NONE
 - IPv4 User Name: [text input]
 - IPv4 Password: [text input]

At the bottom right of the configuration area, a 'Set as default' button is highlighted with a red circle. A help icon (?) is located at the bottom left of the main content area.

11. Verify that your APN screen looks like this:


- Home
- Information
- SD Card
- SMS
- Phonebook
- Settings
- Quick Settings
- Network Settings
 - Dial-up Settings
 - Network Selection
 - APN
- Wi-Fi Settings
- Device Settings
- Firewall
- Router Settings
- Update
- SDCard Upgrade
- USSD

APN

Current APN T-Mobile Static

Mode Auto Manual


Profile T-Mobile Static 

Profile Name * T-Mobile Static 

Add New

PDP Type IPv4 

3GPP Settings :


IPv4 APN * b2b.static 

IPv4 Authentication NONE 

IPv4 User Name 


IPv4 Password 

3GPP2 Settings :

IPv4 APN * b2b.static 

IPv4 Authentication NONE 

IPv4 User Name 

IPv4 Password 



12. Go to **Home**, then click **Connect**

Home

Information

SD Card

SMS

Phonebook

Settings


SDCard Upgrade

USSD

User Information

No.	Host Name	MAC Address	IP Address	Duration

Network Connection



That's it! You're done :)